




# MARINE FENDERS INTERNATIONAL, INC.



- Ultra heavy-duty central steel core load distribution construction
- US Coast Guard approved inner closed cell rigid urethane buoyancy foam

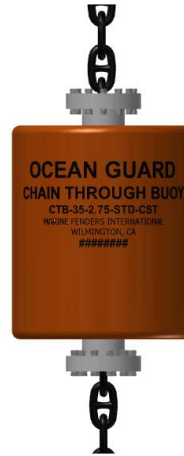

- Impact absorbing, resilient heat laminated cross-linked polyethylene foam core foam
- Thick, tough filament nylon tire cord reinforced urethane skin

## Ocean Guard™ Chain-Through Buoys

Buoy Model CTB #	Buoyancy, Net		Diameter		Height		Height Overall		Buoy Weight	
	lb.	kg	ft.	m.	ft.	m	ft.	m.	lb.	kg.
CTB-100	2,205	1,000	3.8	1.2	4.3	1.3	5.1	1.6	883	400
CTB-150	3,308	1,500	4.3	1.3	4.8	1.5	5.7	1.7	1,084	492
CTB-200	4,410	2,000	4.7	1.4	5.2	1.6	6.1	1.9	1,320	599
CTB-225	4,961	2,250	4.8	1.5	5.4	1.7	6.3	1.9	1,410	639
CTB-275	6,064	2,750	5.1	1.6	5.8	1.8	6.7	2.0	1,585	719
CTB-350	7,718	3,500	5.5	1.7	6.2	1.9	7.1	2.2	1,835	832
CTB-400	8,820	4,000	5.8	1.8	6.5	2.0	7.4	2.2	1,996	905
CTB-450	9,923	4,500	6.0	1.8	6.7	2.1	7.7	2.4	2,260	1,025
CTB-550	12,128	5,500	6.4	1.9	7.2	2.2	8.2	2.5	2,565	1,163

\*\*\* Note: Any buoy model can be made to accommodate any chain size. Changing the chain size will slightly change the weight and dimensions, however.

\* Actual values for above sizes may vary +/- 15% due to variations in materials, temperatures and tolerances.

### Marine Fenders International, Inc.

• 909 Mahar Avenue • Wilmington • California • 90744 • USA

Telephone 1-310-834-7037 • Fax 1-310-834-7825 • E-mail: sales@marinefendersintl.com • www.marinefendersintl.com